


# BISTRO 55 & ALGARVE TECHNICAL DATA

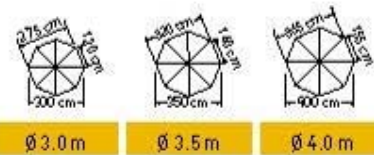


		Ø 3.0 m	Ø 3.5 m	Ø 4.0 m
Segments		8	8	8
Area	m <sup>2</sup>	7	9	12
A	Height closed, with valance	279	287	295
B	Height closed, without valance	259	267	295
C	Headroom with valance	200	200	200
D	Headroom without valance	202	202	222
E	Height of valance	28	28	28
F	Ground clearance (with valance) from spoke edge	113	97	79
G	Ground clearance (without valance) from spoke edge	93	77	79
H	Crank height	92	92	92
Weight without packaging	kg	12	15.5	17.5
<small>MayTex-Acryl without valance</small>				
Support pole diameter	mm	outer-Ø 55, pole thickness 2.5		
Packaging (cardboard sleeve) length 307 cm		Ø 25 cm, approx. 7.5 kg		
Installation base length/width/min. depth	cm	50 / 50 / 60		
Minimum ballast		1 x = approx. 72 kg		
<small>Number of layers of concrete slabs X240 required</small>				

	1.5 x 1.5 m	2.0 x 2.0 m	2.5 x 2.5 m	3.0 x 3.0 m	3.5 x 3.5 m	2.25 x 3.05 m	3.0 x 4.0 m
	4	8	8	8	8	8	8
	2.25	4	6.25	9	12	7	12
A	259	274	280	289	295	279	290
B	259	254	260	269	275	259	270
C	200	200	200	200	200	208	208
D	220	202	202	202	202	210	210
E	18	23	28	28	28	28	28
F	148	120	94	63	32	80	30
G	148	100	74	43	12	60	10
H	70	92	92	92	92	92	92
	15	15	16	18	16	15	16.5
<small>outer-Ø 55, pole thickness 2.5</small>							
<small>Ø 25 cm, approx. 7.5 kg</small>							
<small>50 / 50 / 60</small>							
<small>1 x = approx. 72 kg</small>							

The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube (DM2118, DM2146, DM2150). The increase in height for parasols with other installation base can be seen in the list below:

- Cross pedestal: DM2110 + 6 cm
- Full frame pedestal: DM2411 + 9 cm
- Full frame pedestal: DM2412 + 12 cm
- Full frame pedestal: DM2414 + 16 cm
- Full frame pedestal: DM2420 + 19 cm
- Granite base: DM2141 + 10 cm
- Wheeled pedestal: DM2282 + 14/15 cm
- Anchor plate: DM2261 + 4 cm
- Base plate: DM2271 + 3 cm

3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.



Intermediate and special sizes on request.  
Dimensional tolerance approx. 5%.

